





AXIAL FAN

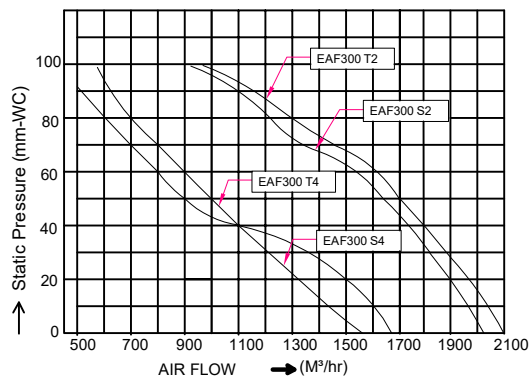


Impeller Rotor :M.S Powder Coated
:Aluminium Casting, Powder Coated in Black
Casting Insulation Class :Aluminium Die Casted
:"F"
Bearings :Ball Bearing
Direction of Rotation :Clockwise
Duty Cycle :SI

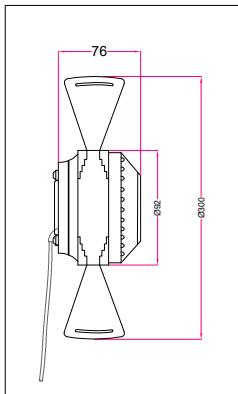

FAN

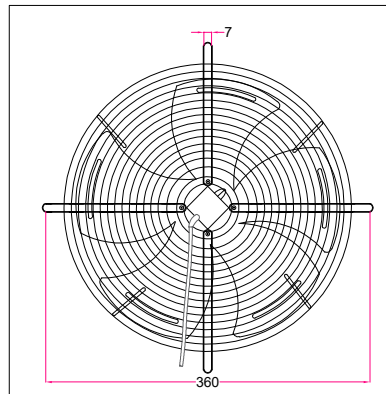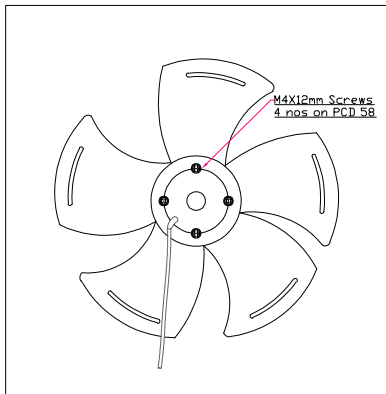

FAN WITH FLAT/BASKET GRILL

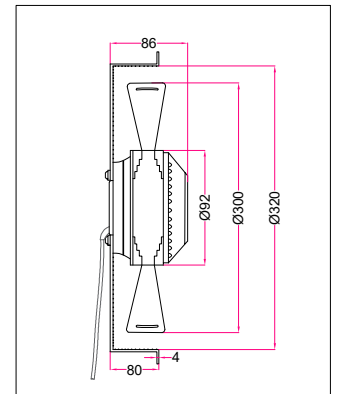

TYPE →	EAF 300 S2	EAF 300 T2	EAF 300 S4	EAF 300 T4
Voltage (V)	230	415	230	415
Current (A)	1	0.8	0.6	0.2
Power (W)	250	250	120	70
Speed (r/min)	2300	2350	1350	1350
Air Flow (M³/hr)	2400	2400	1700	1700
Air Flow (CFM)	1411	1411	1000	1000
Noise (dBA)	70	70	60	55
Capacitor (µF)	6	-	3	-
Weight (kg)	3.1	3.1	3.1	3.1

Note:


*All Dimensions are in mm

*Design specifications and technical characteristics are subject to change without notice.



DRG NO.EEM J 23-03

PL NO. NIL



SCALE
NTS

AXIAL FAN

Model EAF 300 S2,T2/S4,T4

	NAME	SIGNATURE	DATE
DRN	JSV		24-09-2023
CHKD	PSP		24-09-2023
APPD	EKD		24-09-2023

EYYANI ELECTRIC MACHINES PVT.LTD
BANGALORE 560 058
www.eyyani.com
e-mail:Info@eyyani.com