
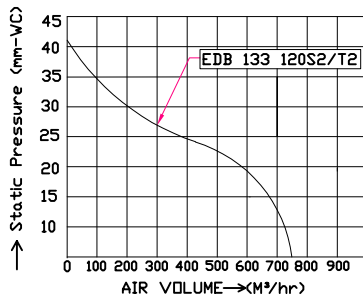


THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF EEM IT SHALL NOT BE USED, REPRODUCED OR DISCLOSED TO OTHERS IN WHOLE OR IN PART WITHOUT THE PERMISSION OF EEM. ANY MANUAL ALTERATION WITHOUT AUTHORISED SIGNATURE SHALL AUTOMATICALLY RENDER THIS DRAWING INVALID

DOUBLE INLET

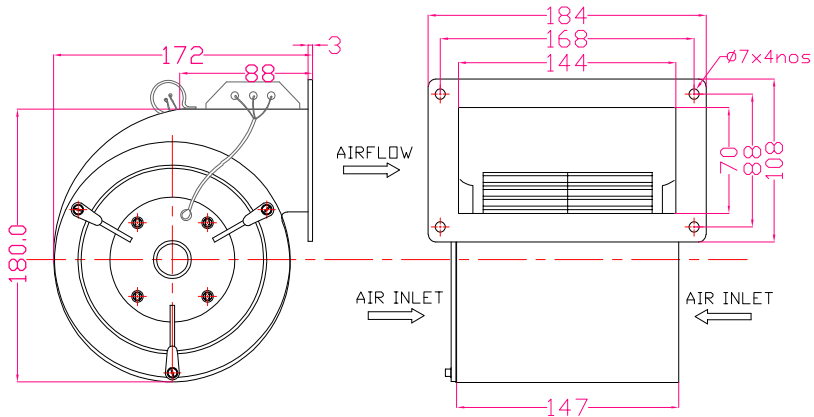

Impeller Rotor	M.S Powder Coated Aluminium Casting, Powder Coated In Black
Casting Insulation Class	Aluminium Die Casted 'F'
Bearings	Ball Bearing
Direction of Rotation	Clockwise
Duty Cycle	SI

MODEL	EDB 133 120 S2	EDB 133 120 T2
Poles	2	2
Volts	230	415
Hz	50	50
Amps	0.64	0.35
Watts	155	150
Airflow (M³/hr)	750	750
RPM	2650	2650
Capacitor Mfd	4.0	-
dB(A)	60	87
Weight Kgs	3.7	3.7
Perm-amb temp°C	60	60

Motor Insulation: Class F

List of Routine Tests conducted.

1. Measurement of Winding Resistance.
2. Measurement of parameter like Input power, Current, speed and vibration at
3. Withstand voltage test at 2200V(30), 1500V(10)
4. Insulation Resistance Test 500V(10)

The minimum Insulation resistance shall be 5MΩ.


Note:

- *All Dimensions in mm
- *Design specifications and technical characteristics are subject to change without notice.
- *Air output and pressure data are provided for Reference only
- *Air output-Conversion to cfm : multiply 'm³/hr' by 0.59
- *Due to continuous development, We reserve the right to modify the above details and specification without prior notice

EYYANI

DRG NO. EEM J 23-05

PL NO. NIL



SCALE
NTS

DOUBLE INLET
MODEL EDB 133 120 S2/T2

DRN

NAME

SIGNATURE

DATE

CHKD

PSP

SIGNATURE

DATE

APPD

EKD

SIGNATURE

DATE

EYYANI ELECTRIC MACHINES PVT.LTD
BANGALORE 560 058
www.eyyani.com
e-mail: info@eyyani.com