




DOUBLE INLET

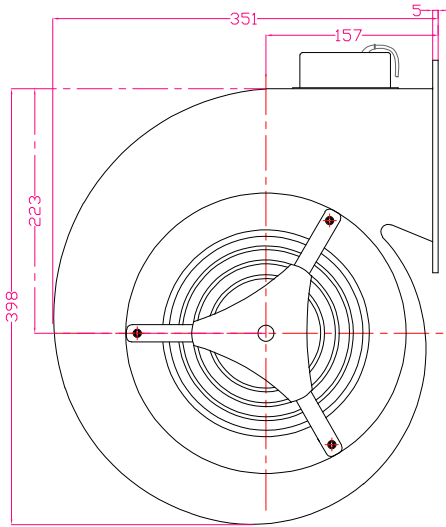

Motor Insulation: Class F
List of Routine Tests conducted.
1.Measurement of Winding Resistance.
2.Measurement of parameter like, Input power, Current, speed and vibration at
3.Withstand voltage test at 2200V(30), 1500V(10)
4.Insulation Resistance Test 500V(10)
The minimum insulation resistance shall be 5MΩ .

Impeller Rotor : M.S Powder Coated
Aluminium Casting, Powder Coated in Black
Casting Insulation Class : Aluminium Die Casted "F"
Bearings : Ball Bearing
Direction of Rotation : Clockwise
Duty Cycle : SI

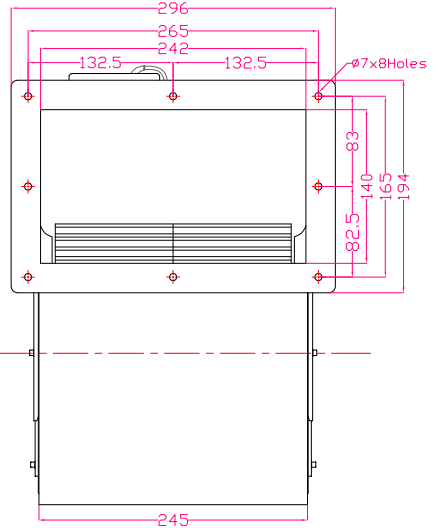


MODEL	EDB 220 215 S4	EDB 220 215 T4
Volts	230	415
Hz	50	50
Amps	1.7	1.40
Watts	375	375
Air-Flow (M³/hr)	1800	1800
RPM	1400	1400
Capacitor MFD	15	-
dB(A)	68	68
Weight Kgs	25	25
Pern-amb temp°c	60	60

Note:
*All Dimensions in mm
*Design specifications and technical characteristics are subject to change without notice.
*Air output and pressure data are provided for Reference only
*Air output-Conversion to cfm : multiply "m³/hr" by 0.59
*Due to continuous development, We reserve the right to modify the above details and specification without prior notice



DRG NO. EEM J 23-10

PL NO. NIL



SCALE
NTS

DOUBLE INLET
MODEL EDB 220 215 S4/T4

	NAME	SIGNATURE	DATE
DRN	JSV		18-10-2023
CHKD	PSP		18-10-2023
APPD	EKD		18-10-2023

EYYANI ELECTRIC MACHINES PVT.LTD
BANGALORE 560 058
www.eyyani.com
e-mail: info@eyyani.com