
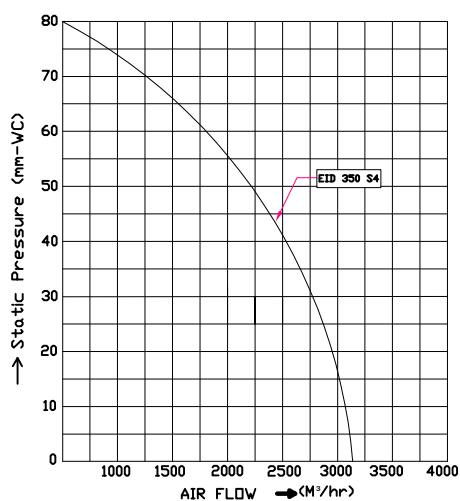
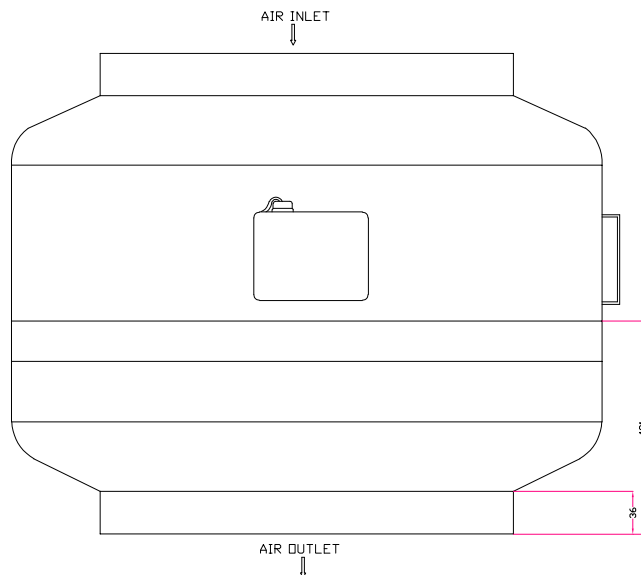


THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF EEM IT SHALL NOT BE USED, REPRODUCED OR DISCLOSED TO OTHERS IN WHOLE OR IN PART WITHOUT THE PERMISSION OF EEM. ANY MANUAL ALTERATION WITHOUT AUTHORISED SIGNATURE SHALL AUTOMATICALLY RENDER THIS DRAWING INVALID

ISSUE	DESCRIPTION	DATE	SIG

INLET DUCT FAN


Impeller :Metal
Rotor :Aluminium Casting,
Powder Coated in Black
Casting :Aluminium Die Casted
Insulation :“F”
Bearings :Ball Bearing

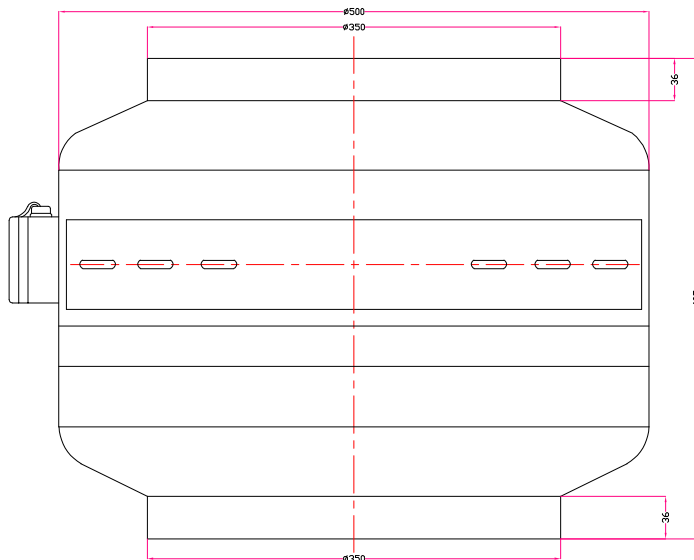

MODEL	EID 350 S4
VOLTAGE (VAC)	230
CURRENT (A)	0.65
POWER (W)	170
AIRFLOW (M³/hr)	3200
STATIC PRESSURE	80
SPEED (RPM)	1350
NOISE dBA	61
CAPACITOR (uf)	6
WEIGHT Kgs	16
TEMP (C°)	60

Motor insulation:Class F
List of Routine Tests conducted.
1.Measurement of Winding Resistance.
2.Measurement of parameter like,Input power,Current, speed and vibration at
3.Withstand voltage test at 2200V(30),1500V(10)
4.Insulation Resistance Test 500V(10)
The minimum insulation resistance shall be 5MΩ .

Note:
*All Dimensions in mm
*Design specifications and technical characteristics are subject to change without notice.
*Air output and pressure data are provided for Reference only
*Air output-Conversion to cfm : multiply“m³/hr” by 0.59
*Due to continuous development. We reserve the right to modify the above details and specification without prior notice

	DRG NO.EEM J 23-07			SCALE NTS	INLINE DUCT FAN MODEL EID 350 S4
	PL NO. NIL				
		NAME	SIGNATURE	DATE	EYYANI ELECTRIC MACHINES PVT.LTD BANGALORE 560 058 www.eyyani.com e-mail:Info@eyyani.com
	DRN	JSV		18-10-2023	
	CHKD	PSP		18-10-2023	
APPD	EKD		18-10-2023		