
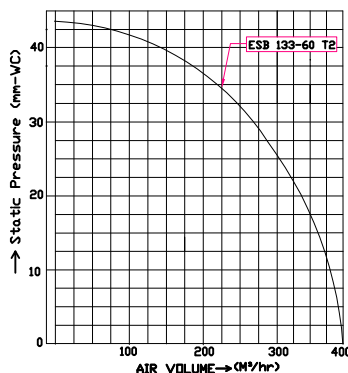


THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF EEM IT SHALL NOT BE USED,REPRODUCED OR DISCLOSED TO OTHERS IN WHOLE OR IN PART WITHOUT THE PERMISSION F EEM. ANY MANUAL ALTERATION WITHOUT AUTHORISED SIGNATURE SHALL AUTOMATICALLY RENDER THIS DRAWING INVALID

SINGLE INLET

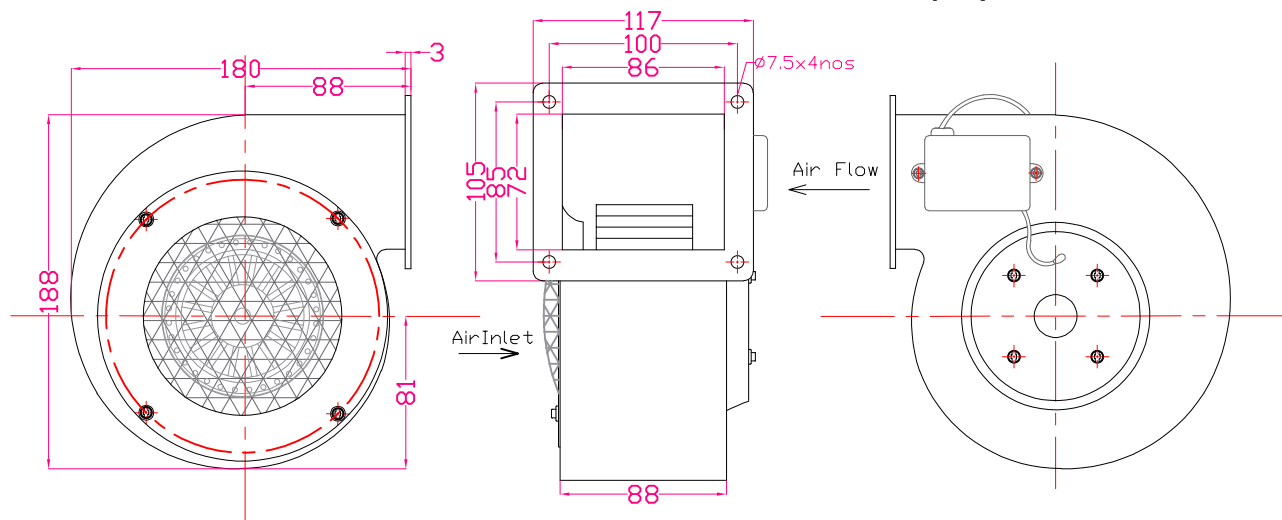

MODEL	ESB 133 60 T2
POLES	2
VOLTAGE (VAC)	415
CURRENT (A)	0.4
POWER (W)	110
SPEED (RPM)	2650
AIRFLOW (M³/hr)	400
AIRFLOW (CFM)	235
NOISE dBA	65
CAPACITOR uF	-
WEIGHT Kg	3.2
TEMP (°C)	60

Motor insulation: Class F
List of Routine Tests conducted.
1.Measurement of Winding Resistance.
2.Measurement of parameter like,Input power,Current, speed and vibration at
3.Withstand voltage test at 2200V(30),1500V(10)
4.Insulation Resistance Test 500V(10)
The minimum insulation resistance shall be 5MΩ .


Note:

- *All Dimensions in mm
- *Design specifications and technical characteristics are subject to change without notice.
- *Air output and pressure data are provided for Reference only
- *Air output-Conversion to cfm : divide "m³/hr" by 1.7
- *Due to continuous development, We reserve the right to modify the above details and specification without prior notice



DRG NO.EEM J 23-006

PL NO. NIL



SCALE
NTS

SINGLE INLET
Model ESB 133-60 T2

DRN
CHKD
APPD

NAME
JSV
PSP
EKD

SIGNATURE

DATE

17-07-2023
17-07-2023
17-07-2023

EYYANI ELECTRIC MACHINES PVT.LTD
BANGALORE 560 058
www.eyyani.com
e-mail:Info@eyyani.com