
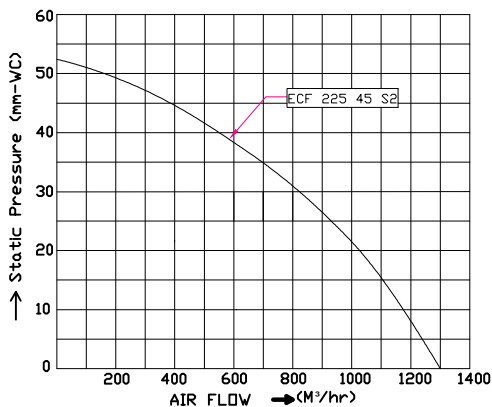
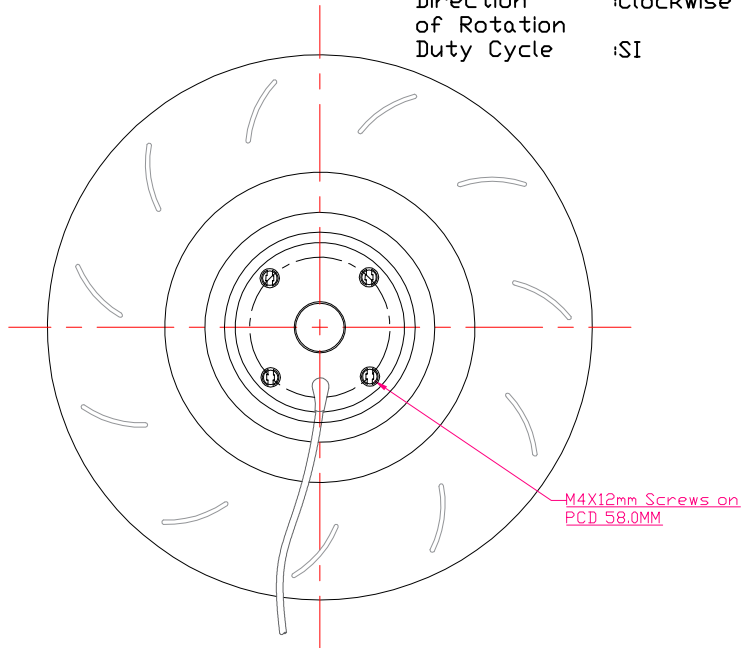


THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF EEM IT SHALL NOT BE USED,REPRODUCED OR DISCLOSED TO OTHERS IN WHOLE OR IN PART WITHOUT THE PERMISSION F EEM. ANY MANUAL ALTERATION WITHOUT AUTHORISED SIGNATURE SHALL AUTOMATICALLY RENDER THIS DRAWING INVALID

ISSUE	DESCRIPTION	DATE	SIG

BACKWARD CURVED FAN

Impeller	Plastic Moulded
Rotor	Aluminium Casting, Powder Coated in Black
Casting	Aluminium Die Casted
Insulation	"F"
Class	
Bearings	Ball Bearing
Direction of Rotation	Clockwise
Duty Cycle	SI

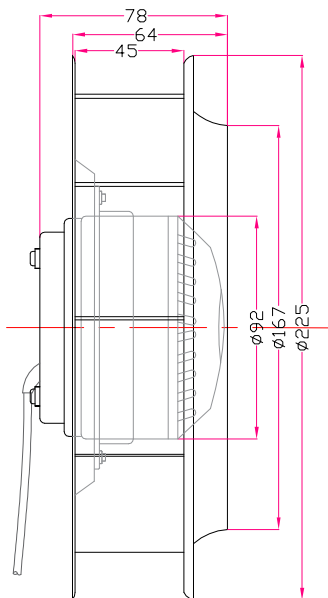


MODEL	ECF 225 45 S2
VOLTAGE (VAC)	230
FREQUENCY (HZ)	50
AIR.FLOW (m³/hr)	1500
SPEED (RPM)	2600
POWER INPUT (watt)	175
CURRENT (Amp)	0.85
CAPACITOR (mfd)	6
NOICE dBA	70
PERM AMP TEMP (c°)	60

Motor insulation:Class F
List of Routine Tests conducted.
1.Measurement of Winding Resistance.
2.Measurement of parameter like,Input power,
Current,speed and vibration at
3.Withstand voltage test at 2200V(30),1500V(10)
4.Insulation Resistance Test 500V(10)
The minimum insulation resistance shall be 5MΩ .

Note:
*All Dimensions in mm
*Design specifications and technical characteristics
are subject to change without notice.
*Air output and pressure data are provided for
Reference only
*Air output-Conversion to cfm : multiply "m³/hr" by 0.59
*Due to continuous development. We reserve the
right to modify the above details and specification
without prior notice



DRG NO.EEM J 23-03
PL NO. NIL



SCALE
NTS

BACKWARD CURVED FAN
MODEL ECF 225 45 S2

	NAME	SIGNATURE	DATE
DRN	JSV		18-10-2023
CHKD	PSP		18-10-2023
APPD	EKD		18-10-2023

EYYANI ELECTRIC MACHINES PVT.LTD
BANGALORE 560 058
www.eyyani.com
e-mail:Info@eyyani.com