





AXIAL FAN

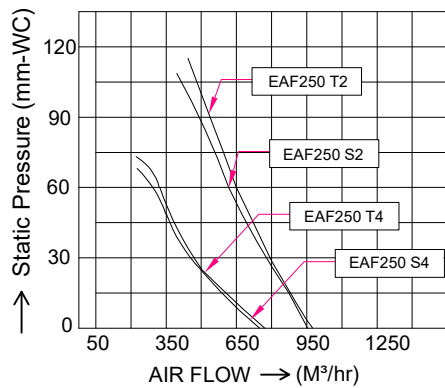


Impeller Rotor : M.S Powder Coated
 : Aluminium Casting, Powder Coated in Black
 Casting Insulation Class : Aluminium Die Casted
 : "F"
 Bearings : Ball Bearing
 Direction of Rotation : Clockwise
 Duty Cycle : SI

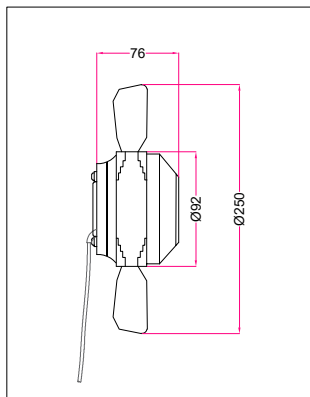

FAN

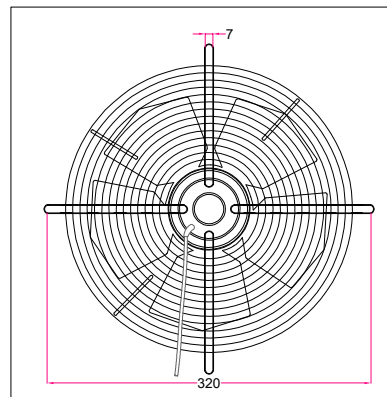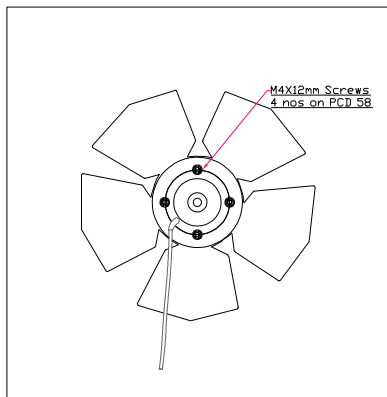

FAN WITH FLAT/BASKET GRILL

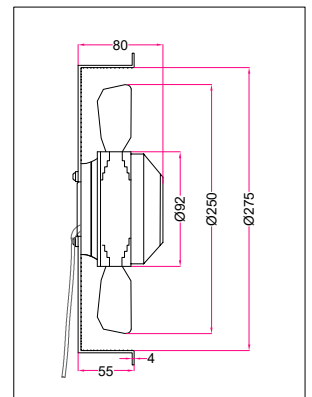

TYPE →	EAF 250 S2	EAF 250 T2	EAF 250 S4	EAF 250 T4
Voltage (V)	230	415	230	415
Current (A)	0.5	0.3	0.3	0.2
Power (W)	130	130	80	65
Speed (r/min)	2500	2450	1400	1400
AirFlow (M³/hr)	1700	1700	950	950
AirFlow (CFM)	1000	1000	558	558
Noise (dBA)	65	65	58	58
Capacitor (µF)	3	-	3	-
Weight (kg)	2.5	2.5	2.5	2.5

Note:


*All Dimensions are in mm

*Design specifications and technical characteristics are subject to change without notice.



DRG NO.EEM J 23-02

PL NO. NIL



SCALE
NTS

AXIAL FAN

Model EAF 250 S2,T2/S4,T4

	NAME	SIGNATURE	DATE
DRN	JSV		24-09-2023
CHKD	PSP		24-09-2023
APPD	EKD		24-09-2023

EYYANI ELECTRIC MACHINES PVT.LTD
 BANGALORE 560 058
 www.eyyani.com
 e-mail:Info@eyyani.com